DRG NO. BS-6F

This is a "PROVISIONAL BUILDING PLAN" approved only for the purpose of inviting objections from the general public.

Architect(HQ) | STP(HQ) Member Secretary BPAC | STP(G) Member BPAC | CTP(Hr.) Chairman BPAC

Ram Avtar Bassi AE(HQ)

DTP(HQ) Member BPAC

JD PA ATP

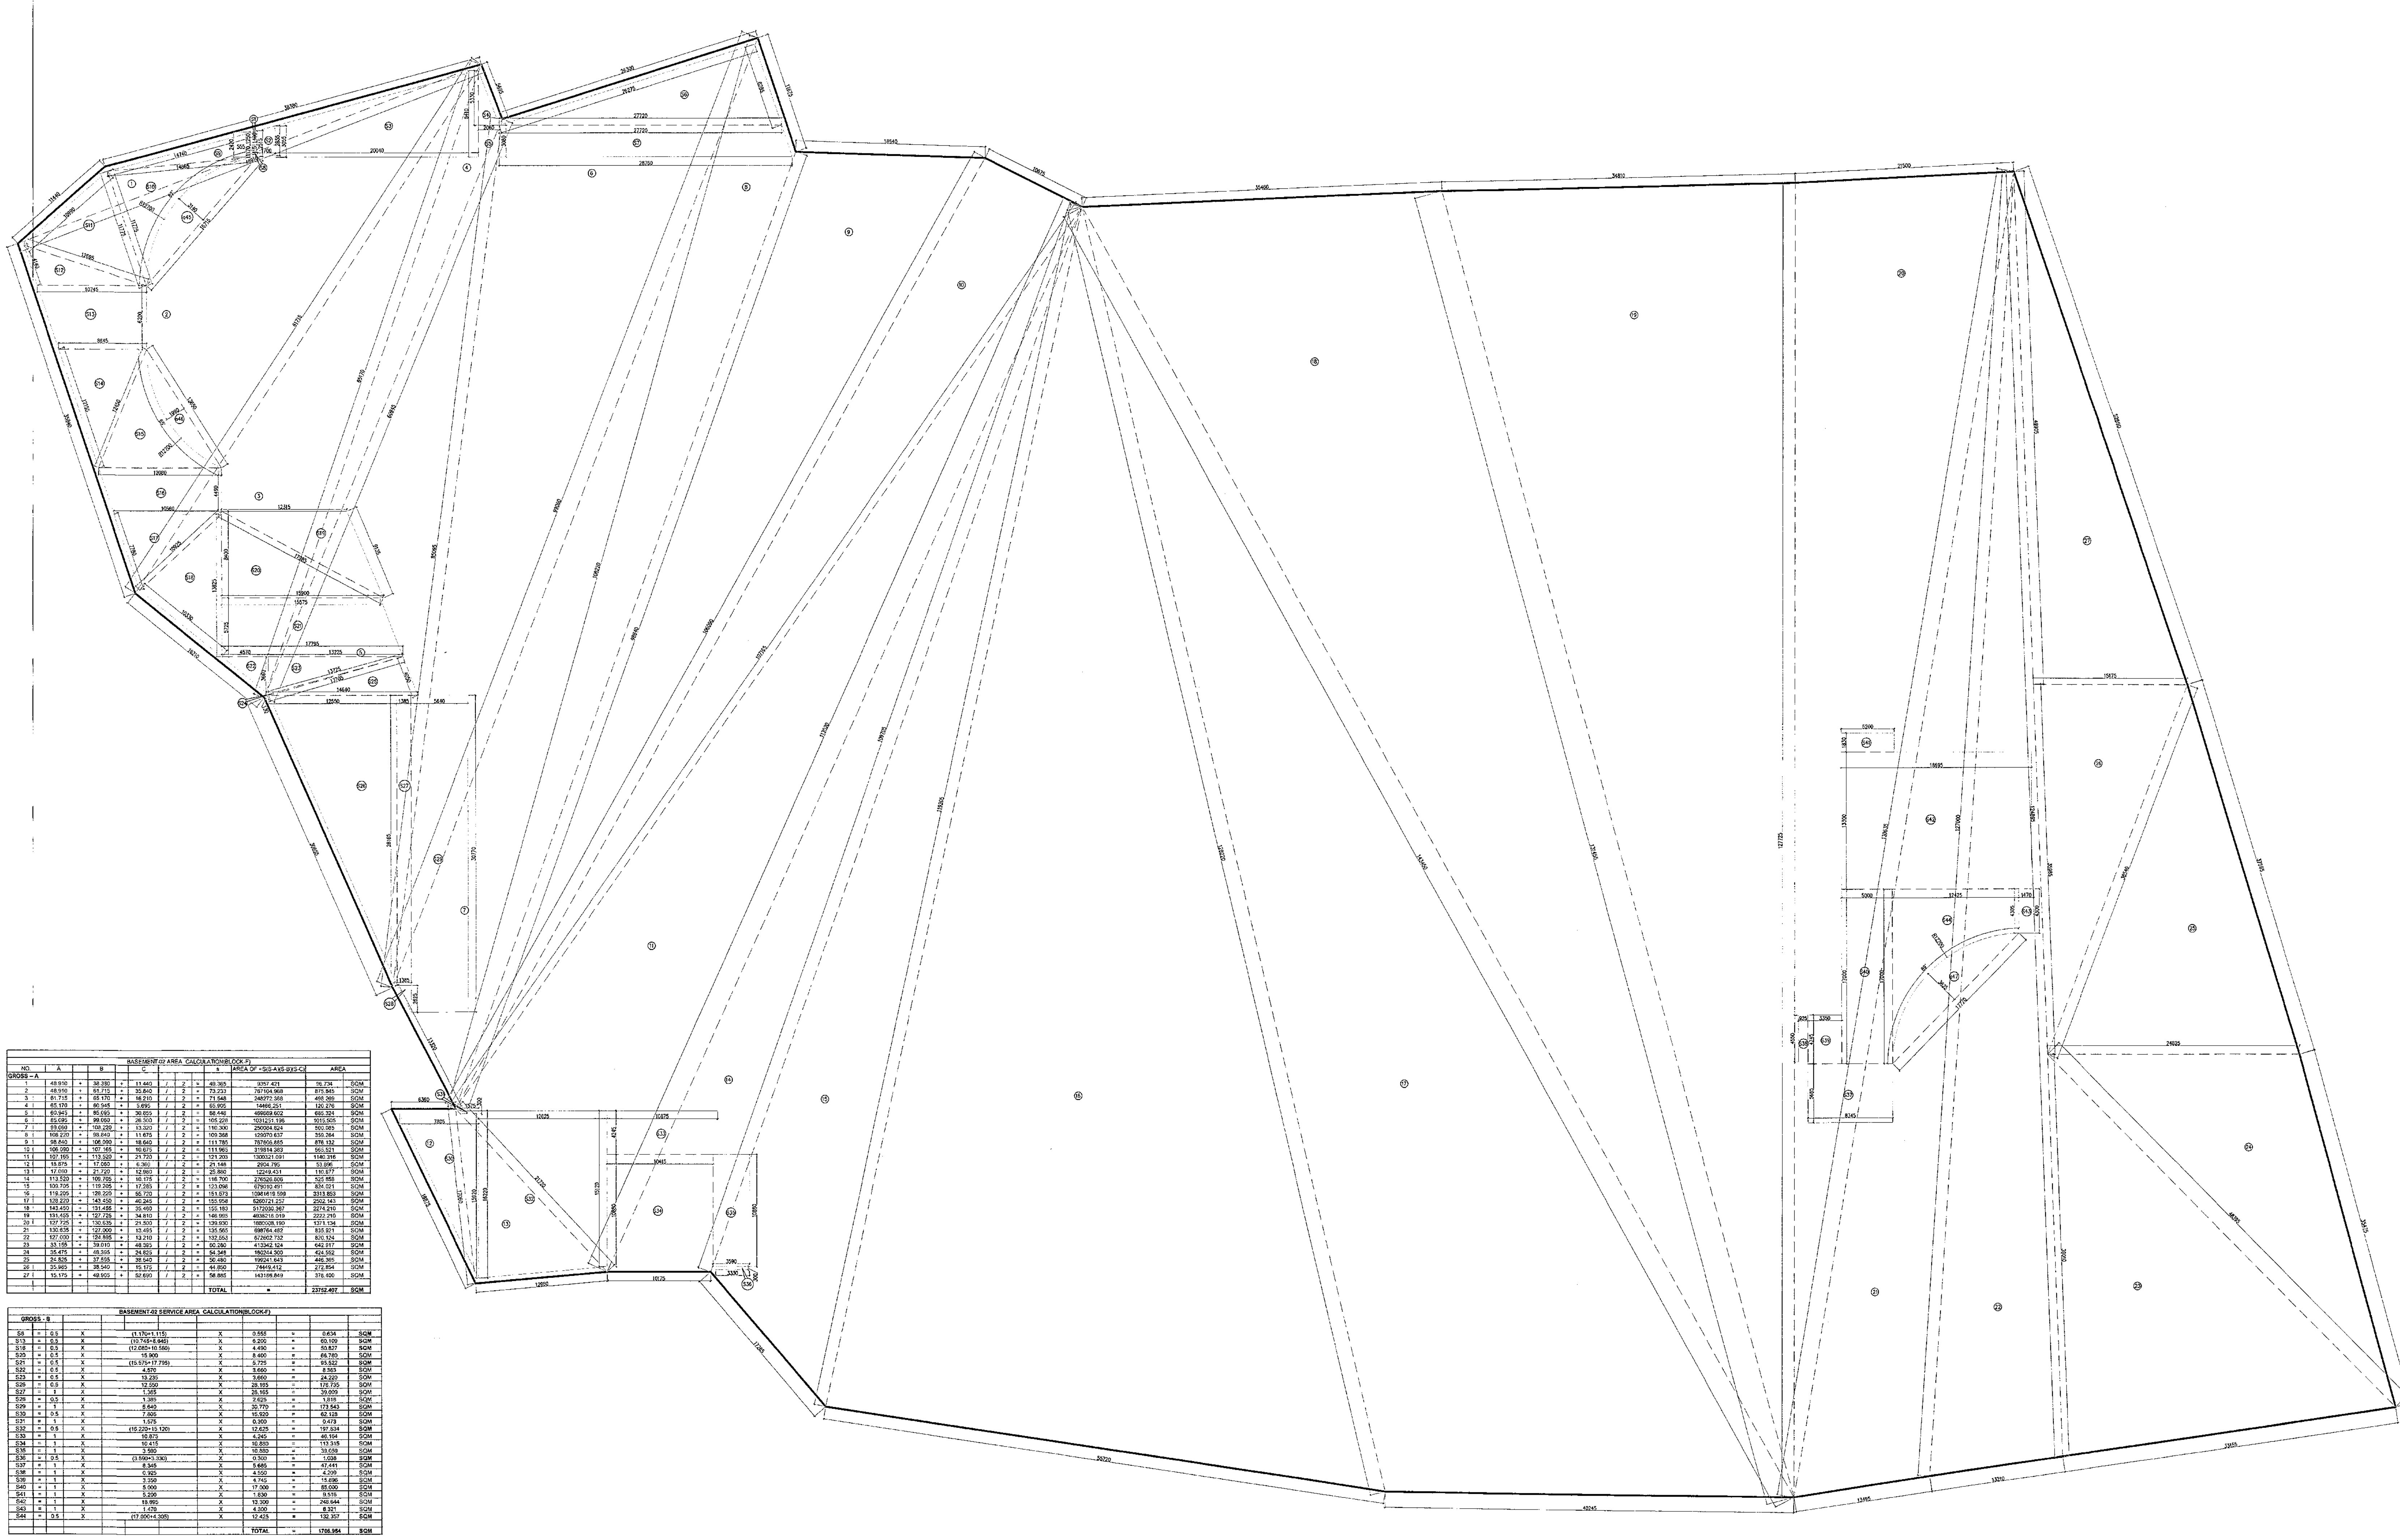

BASEMENT-2

BASEMENT-2

BASEMENT-02 AREA CALCULATION(BLOCK-F)											
NO.	A		B		C				s	AREA OF =S(S-A)(S-B)(S-C)	AREA	
GROSS – A											
1	48.910	+	38.380	+	11.440	/	2	=	49.365	9357.421	96.734	SQM
2	48.910	+	61.715	+	35.840	/	2	=	73.233	767104.968	875.845	SQM
3	61.715	+	65.170	+	16.210	/	2	=	71.548	248272.388	498.269	SQM
4	65.170	+	60.945	+	5.695	/	2	=	65.905	14466.251	120.276	SQM
5	60.945	+	85.095	+	30.855	/	2	=	88.448	469689.602	685.324	SQM
6	85.095	+	99.060	+	26.300	/	2	=	105.228	1031251.196	1015.505	SQM
7	99.060	+	108.220	+	13.320	/	2	=	110.300	250084.824	500.085	SQM
8	108.220	+	98.840	+	11.675	/	2	=	109.368	129070.637	359.264	SQM
9	98.840	+	106.090	+	18.640	/	2	=	111.785	767606.865	876.132	SQM
10	106.090	+	107.165	+	10.675	/	2	=	111.965	319814.383	565.521	SQM
11	107.165	+	113.520	+	21.720	/	2	=	121.203	1300321.091	1140.316	SQM
12	18.875	+	17.060	+	6.360	/	2	=	21.148	2904.795	53.896	SQM
13	17.060	+	21.720	+	12.980	/	2	=	25.880	12249.431	110.677	SQM
14	113.520	+	109.705	+	10.175	/	2	=	116.700	276526.806	525.856	SQM
15	109.705	+	119.205	+	17.285	/	2	=	123.096	679010.491	824.021	SQM
16	119.205	+	128.220	+	55.720	/	2	=	151.573	10981619.599	3313.853	SQM
17	128.220	+	143.450	+	40.245	/	2	=	155.958	6260721.257	2502.143	SQM
18	143.450	+	131.455	+	35.460	/	2	=	155.183	5172030.367	2274.210	SQM
19	131.455	+	127.725	+	34.810	/	2	=	146.995	4938216.019	2222.210	SQM
20	127.725	+	130.635	+	21.500	/	2	=	139.930	1880008.190	1371.134	SQM
21	130.635	+	127.000	+	13.495	/	2	=	135.565	698764.462	835.921	SQM
22	127.000	+	124.895	+	13.210	/	2	=	132.553	672602.732	820.124	SQM
23	33.155	+	39.010	+	48.395	/	2	=	60.280	413342.124	642.917	SQM
24	35.475	+	48.395	+	24.825	/	2	=	54.348	180244.300	424.552	SQM
25	24.825	+	37.595	+	38.540	/	2	=	50.480	199241.643	446.365	SQM
26	35.965	+	38.540	+	15.175	/	2	=	44.850	74449.412	272.854	SQM
27	15.175	+	49.905	+	52.690	/	2	=	58.885	143186.849	378.400	SQM
									TOTAL	=	23752.407	SQM

BASEMENT-02 SERVICE AREA CALCULATION(BLOCK-F)									
GROSS - B									
S8	=	0.5	X	(1.170+1.115)	X	0.555	=	0.634	SQM
S13	=	0.5	X	(10.745+8.645)	X	6.200	=	60.109	SQM
S16	=	0.5	X	(12.080+10.560)	X	4.490	=	50.827	SQM
S20	=	0.5	X	15.900	X	8.400	=	66.780	SQM
S21	=	0.5	X	(15.575+17.795)	X	5.725	=	95.522	SQM
S22	=	0.5	X	4.570	X	3.660	=	8.363	SQM
S23	=	0.5	X	13.235	X	3.660	=	24.220	SQM
S26	=	0.5	X	12.550	X	28.165	=	176.735	SQM
S27	=	1	X	1.385	X	28.165	=	39.009	SQM
S28	=	0.5	X	1.385	X	2.625	=	1.818	SQM
S29	=	1	X	5.640	X	30.770	=	173.543	SQM
S30	=	0.5	X	7.805	X	15.920	=	62.128	SQM
S31	=	1	X	1.575	X	0.300	=	0.473	SQM
S32	=	0.5	X	(16.220+15.120)	X	12.625	=	197.834	SQM
S33	=	1	X	10.875	X	4.245	=	46.164	SQM
S34	=	1	X	10.415	X	10.880	=	113.315	SQM
S35	=	1	X	3.590	X	10.880	=	39.059	SQM
S36	=	0.5	X	(3.590+3.330)	X	0.300	=	1.038	SQM
S37	=	1	X	8.345	X	5.685	=	47.441	SQM
S38	=	1	X	0.925	X	4.550	=	4.209	SQM
S39	=	1	X	3.350	X	4.745	=	15.896	SQM
S40	=	1	X	5.000	X	17.000	=	85.000	SQM
S41	=	1	X	5.200	X	1.830	=	9.516	SQM
S42	=	1	X	18.695	X	13.300	=	248.644	SQM
S43	=	1	X	1.470	X	4.300	=	6.321	SQM
S44	=	0.5	X	(17.000+4.305)	X	12.425	=	132.357	SQM
						TOTAL	=	1706.954	SQM

BASEMENT-02 SERVICE AREA CALCULATION(BLOCK-F)											
NO.	A		B		C				s	AREA OF =S(S-A)(S-B)(S-C)	AREA	
GROSS – C											
S9	14.740	+	14.865	+	2.420	/	2	=	16.013	317.811	17.827	SQM
S10	14.865	+	11.775	+	16.715	/	2	=	21.678	7257.066	85.188	SQM
S11	11.775	+	12.695	+	10.990	/	2	=	17.730	3583.025	59.858	SQM
S12	12.695	+	10.745	+	4.140	/	2	=	13.790	443.704	21.064	SQM
S14	8.645	+	12.155	+	12.450	/	2	=	16.625	2475.874	49.758	SQM
S15	12.450	+	12.080	+	13.650	/	2	=	19.090	4833.825	69.526	SQM
S17	10.560	+	10.925	+	7.780	/	2	=	14.633	1513.944	38.909	SQM
S18	10.925	+	13.825	+	10.330	/	2	=	17.540	3107.803	55.748	SQM
S19	12.315	+	17.985	+	9.135	/	2	=	19.718	2676.035	51.730	SQM
S24	13.725	+	13.705	+	0.130	/	2	=	13.780	0.776	0.881	SQM
S25	13.705	+	14.640	+	4.050	/	2	=	16.198	763.832	27.638	SQM
									TOTAL	=	478.128	SQM

BASEMENT-02 DEDUCTION AREA CALCULATION(BLOCK-F)																					
ARC AREA																					
GROSS-D																					
a45	3.14	X	12.700	X	12.700	X	82	/	360	-	0.5	X	12.700	-	3.140	X	16.715	=	35.460	SQM
a46	3.14	X	12.700	X	12.700	X	65	/	360	-	0.5	X	12.700	-	1.990	X	13.650	=	18.347	SQM
a47	3.14	X	12.700	X	12.700	X	89	/	360	-	0.5	X	12.700	-	3.625	X	17.770	=	44.574	SQM
																	TOTAL	=	98.382	SQM

SERVICE AREA BASEMENT-02(BLOCK-F)									
GROSS – E									
s1	=	0.5	X	(1.400+1.250)	X	0.555	=	0.735	SQM
s2	=	0.5	X	(2.855+2.515)	X	1.700	=	4.565	SQM
s3	=	0.5	X	(8.410+3.055)	X	20.040	=	114.879	SQM
s4	=	0.5	X	2.060	X	5.330	=	5.490	SQM
s5	=	1	X	2.060	X	3.080	=	6.345	SQM
s7	=	0.5	X	(28.760+27.720)	X	3.080	=	86.979	SQM
						TOTAL	=	218.993	SQM

SERVICE AREA BASEMENT-02(BLOCK-F)												
NO.	A		B		C				s	AREA OF =S(S-A)(S-B)(S-C)	AREA	
GROSS – F												
s6	26.275	+	27.720	+	8.265	/	2	=	31.140	11841.556	108.819	SQM
									TOTAL	=	108.819	SQM

			GROSS – A						
NET BASEMENT-02 AREA		=	23752.407	SQM					
SERVICE AREA OF BASEMENT-02									
	GROSS – B		GROSS – C		GROSS – E		GROSS – F		GROSS – D
=	1706.954	+	478.128	+	218.993	+	108.819	-	98.382
=	2414.51	SQM							
NET PARKING AREA OF BASEMENT-02			GROSS – 1		GROSS – 2				
		=	23752.407	-	2414.51203				
		=	21337.895	SQM					
NO OF CAR ARHIEVABLE OF BASEMENT -02		=	21337.895	/	32				
		=	666.809	CARS					
	OR SAY	=	667	CARS					

KEY PLAN

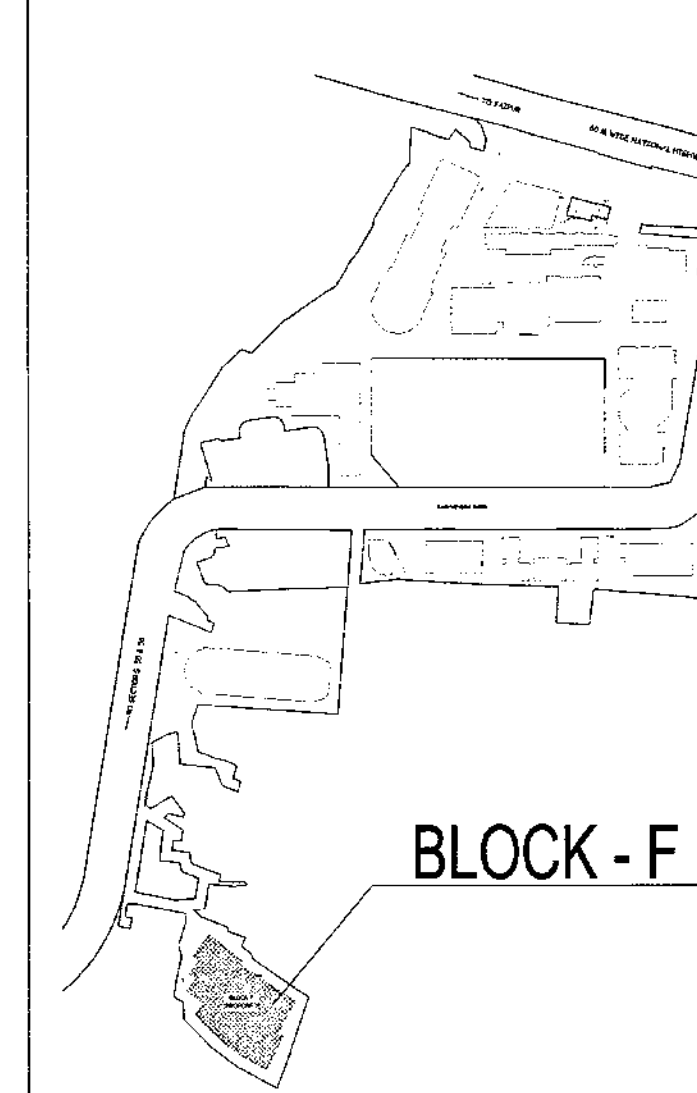

DLF 50032

Architect Hafeez Contractor
29 Bank Street, Bombay 400 023. Tel:2661920

RSMS ARCHITECTS

RSMS ARCHITECTS PVT. LTD.
69,Nora Niwas Bhawani Kunj
(Behind D2), Vasant Kunj,
New Delhi-110070.
Tel.: 011-26898616,26898617
www.rsms-arch.com

Project:

PROPOSED BUILDING PLANS OF BUILDING – B AND REVISED BUILDING PLANS OF BUILDING-C, D, E, & F IN CYBER CITY UNDER TRANSIT ORIENTED DEVELOPMENT (TOD)POLICY FOR MIX LAND USED COLONY(70% IT/ITES/+30% COMMERCIAL) MEASURING 108.55922 ACRES IN SECTOR 24, 25 & 25-A, GURUGRAM MANESAR URBAN COMPLEX BEING DEVELOPED BY DLF CYBER CITY DEVELOPERS LIMITED

OWNER: DLF

DLF Cyber City Developers Ltd.
10th Floor DLF Gateway Tower,
DLF Cyber City,Gurugram,Haryana
Pin: 122002

DRAWING TITLE: –

AREA CALCULATION OF BASEMENT-02
BLOCK-F

REVISION	JOB NO: –	DRG NO. BS-6F	NORTH: –
	SCALE: – 1:200	DATE: – 01-04-2021	
FILE: –	DEALT BY: –	CHECKED BY:	APPROVED BY: –
ARCHITECT'S SEAL & SIGNATURE		OWNER'S SEAL & SIGNATURE	