


KEY PLAN

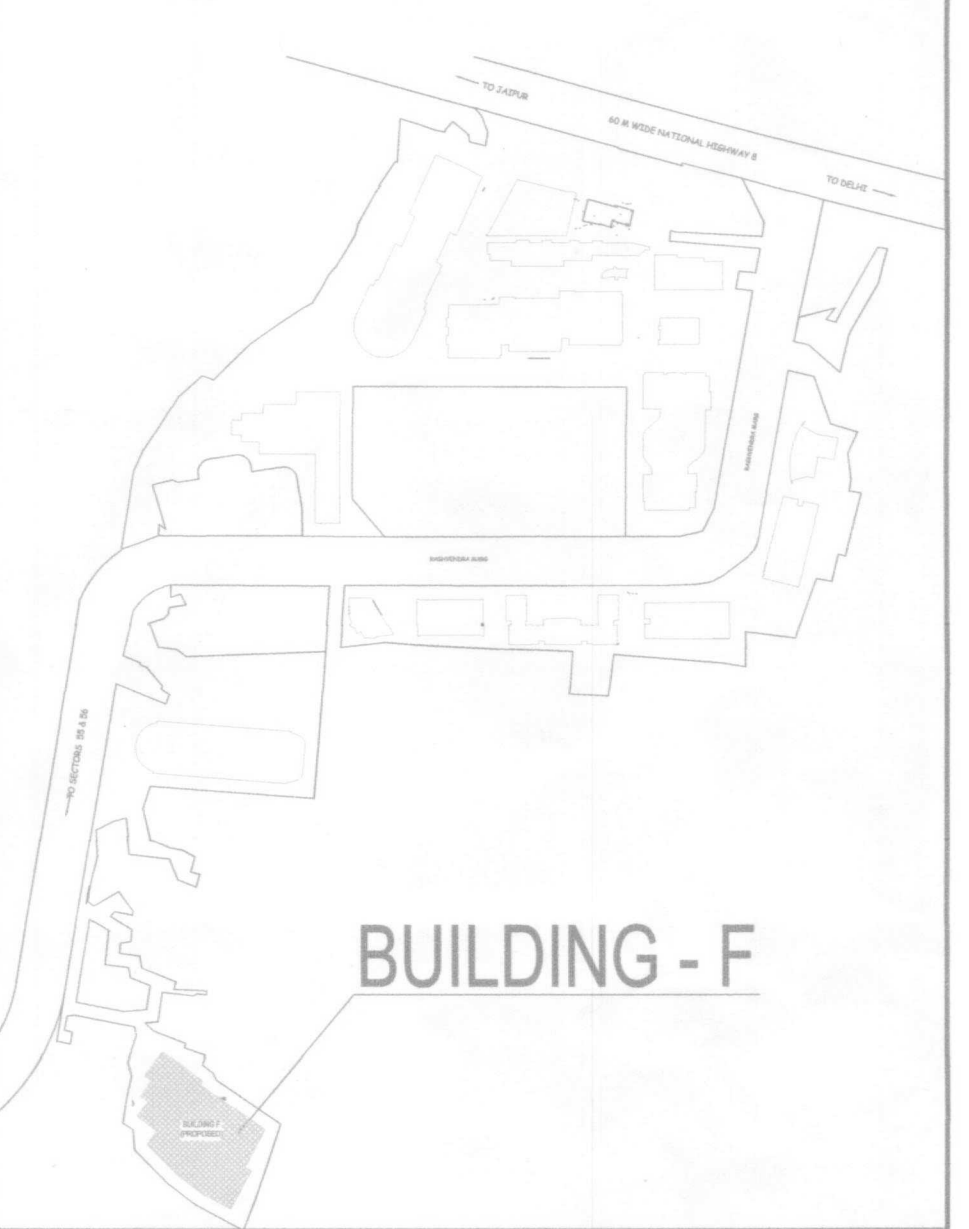

BUILDING - F

LEGEND FOR PLUMBING-

S.NO.	SYMBOL	DESCRIPTION
01.	①	110 OD SOL PIPE
02.	②	110 OD WASTE PIPE
03.	③	160 OD WASTE PIPE
04.	④	100 OD WASTE PIPE FOR KITCHEN
05.	⑤	180 OD WASTE PIPE FOR KITCHEN
06.	⑥	75 OD ANTISIPHONAGE PIPE
07.	⑦	COLD WATER SUPPLY PIPE
08.	⑧	FLUSHING WATER SUPPLY PIPE
09.	⑨	160 OD TERRACE RAIN WATER PIPE
10.	⑩	DOMESTIC WATER RISER TO G/H FROM FROM W/P
11.	⑪	FLUSHING WATER RISER TO G/H
12.	⑫	110 OD BASEMENT & POODUM DRAIN PIPE
13.	FD	FLOOR DRAIN
14.	FT	FLOOR TRAP
15.	UT	URNAL TRAP
16.	CDP	FLOOR CLEAN OUT
17.	—	SOL PIPE
18.	—	WASTE PIPE
19.	—	FLUSHING WATER SUPPLY(DRAINITY SUPPLY)
20.	—	DOMESTIC WATER SUPPLY(DRAINITY SUPPLY)

DOOR SCHEDULE

S.NO.	DOOR NAME	SIZE	TYPE	FINISH
01.	D1	3000X2450	—	—
02.	D2	1500X2450	—	—
03.	D3	800X2450	—	—
04.	D4	2000X2450	—	—
05.	D5	2000X2450	—	—
06.	D6	3000X2450	—	—
07.	D7	880X2450	—	—
08.	D8	1040X2450	—	—
09.	D9	1200X2450	—	—

PRE DOOR SCHEDULE

S.NO.	DOOR NAME	SIZE	TYPE	FINISH
10.	FD	2150X2450	—	—
11.	FT	700X2450	—	—
12.	FD2	1725X2450	—	—

REFUGE AREA CALCULATION  
6TH,10TH & 14TH FLOOR  
(BUILDING - F)

REFUGE AREA CALCULATION 7TH & 11TH FLOOR (BUILDING - F)

AREA	NO. OF OCCUPANTS	AREA (SQM)	AREA (SQM)	AREA (SQM)	AREA (SQM)
GROSS - A					
R1	1	14.300	X	8.000	= 114.890 SQM
R2	0.5	1.500	X	8.000	= 8.447 SQM
R3	0.5	1.750	X	1.185	= 1.073 SQM
R4	0.5	1.100	X	1.250	= 1.058 SQM
R5	1	6.910	X	2.810	= 18.035 SQM
R6	1	2.070	X	1.190	= 1.915 SQM
R7	1	2.915	X	2.800	= 8.053 SQM
R8	1	11.850	X	13.095	= 153.724 SQM
R9	1	2.905	X	13.195	= 38.128 SQM
R10	1	17.320	X	12.875	= 223.124 SQM
R11	1	0.075	X	2.140	= 0.281 SQM
R12	1	14.655	X	6.315	= 92.183 SQM
R13	0.5	2.370	X	0.815	= 1.937 SQM
R14	1	0.075	X	1.700	= 0.128 SQM
R15	0.5	0.850	X	2.380	= 1.912 SQM
R16	1	0.400	X	0.875	= 0.405 SQM
R17	1	13.560	X	4.440	= 61.563 SQM
R18	1	0.900	X	0.510	= 0.460 SQM
R19	1	0.100	X	2.775	= 0.278 SQM
TOTAL					= 773.489 SQM

REFUGE AREA

AREA OF 6TH,10TH & 14TH FLOOR	=	11664.430
AREA OF 7TH,11TH & 15TH FLOOR	=	13456.813
TOTAL	=	24121.243 SQM

REQUIRED REFUGE AREA  
24121.043X0.310 = 7477.551 SQM

ADDITIONAL SPACE TO ACCOMMODATE ONE WHEEL CHAIR SPACE FOR EVERY 200 OCCUPANTS  
8.9 X 12 = 106.8 SQM

REFUGE AREA PROVIDED = 773.489 SQM

(BUILDING - F)

TYPICAL FLOOR	LEVEL	FINISH
6th	+24850	—
10th	+41850	—
14th	+58450	—

A.D.F.O. (A.O.)  
DFS PKL  
Member B.P.C.

Architect  
Hafeez Contractor  
29 Bunk Street, Bunkay 400 023, Tel: 011-26141920

DLF45460

Architect  
Hafeez Contractor  
29 Bunk Street, Bunkay 400 023, Tel: 011-26141920

RISMS ARCHITECTS

RSMS ARCHITECTS PVT. LTD.  
69, Nora Niwas - Bhowani Kunj  
(Behind D2), Vasant Kunj,  
New Delhi-110070.  
Tel: 011-26898616, 26898617  
www.rsms-arch.com

PROPOSED BUILDING PLAN OF BUILDING - C, BUILDING - D, BUILDING - E AND BUILDING - F IN 94.57485 ACRES DLF CYBER CITY, SECTOR 24, 25 & 25A, GURGAON, HARYANA.

OWNER: DLF Cyber City Developers Ltd.  
DLF 10th Floor DLF Gateway Tower,  
DLF Cyber City, Gurugram, Haryana  
Pin: 122002

DRAWING TITLE: BUILDING - F  
TYPICAL (6TH, 10TH, 14TH)  
FLOOR PLAN

REVISION	JOB NO. -	DRG NO. -	NORTH -
		BF-07	N
	SCALE: -	DATE: -	
	1:200	16-05-2018	
FILE -	DEALT BY -	CHECKED BY -	APPROVED BY -

ARCHITECT'S SEAL & SIGNATURE

OWNER'S SEAL & SIGNATURE