


DRG NO. SS-A-101

KEY PLAN

F.O. (HQ)
DFS PKL
Member B.P.C.

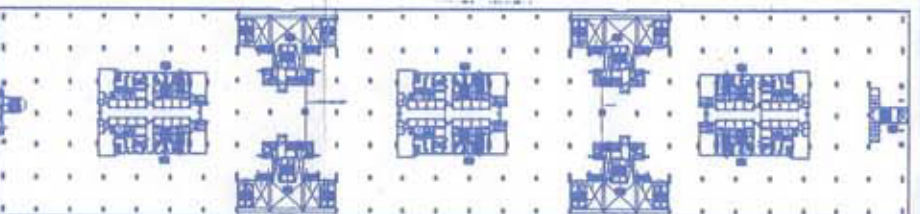

BLOCK-A BLOCK-B BLOCK-C

NOTES

This development have been conceived, designed and drafted on basis of the following parameters:

1. All toilets will be mechanically ventilated. Conditioned air from the office floor will be sucked in to the toilets and vented out through a vent shaft
2. Basement will be artificially ventilated.
3. All spaces (parking basement, service basement ect.) will be artificially lit. Any natural light which is available in the office spaces is only incidental and not essential to the functioning of the buildings.
4. 100% standby generating capacity will be provided for the entire electrical requirement of the total scheme. This therefore includes standby generation for all common services, fire services, lifts etc. and also the entire electrical load for ventilation & air-conditioning lights and all office equipment.
5. This building will be sprinkled as per NBC norms.

Architect
Hafeez
Contractor

29 Barch Street, Bombay 400 023, Tel:2661920

PROJECT:-
REVISED BUILDING PLAN OF
CYBERPARK COLONY AREA
MEASURING 11.816 ACRES(LICENCE
NO.180 OF 2007 DATED 02.05.2007 IN
SECTOR 20, GURGAON MANESAR
URBAN COMPLEX

OWNER:
DLF M/S DLF CYBER CITY
DEVELOPERS LTD.


CONSULTANT:-

DRG.TITLE:-
**AREA CALCULATION
OF GROUND
COVERAGE**

REVISION	JOB NO:-	DRG NO:- SS-A-101	NORTH:-
	SCALE:- 1:250	DATE:- 21/08/2017	

FILE:-	DEALT BY:-	CHECKED BY:-	APPROVED BY:-
--------	------------	--------------	---------------

SIGNATURE & SEAL OF ARCHITECT:-	SIGNATURE & SEAL OF OWNER:-
------------------------------------	--------------------------------

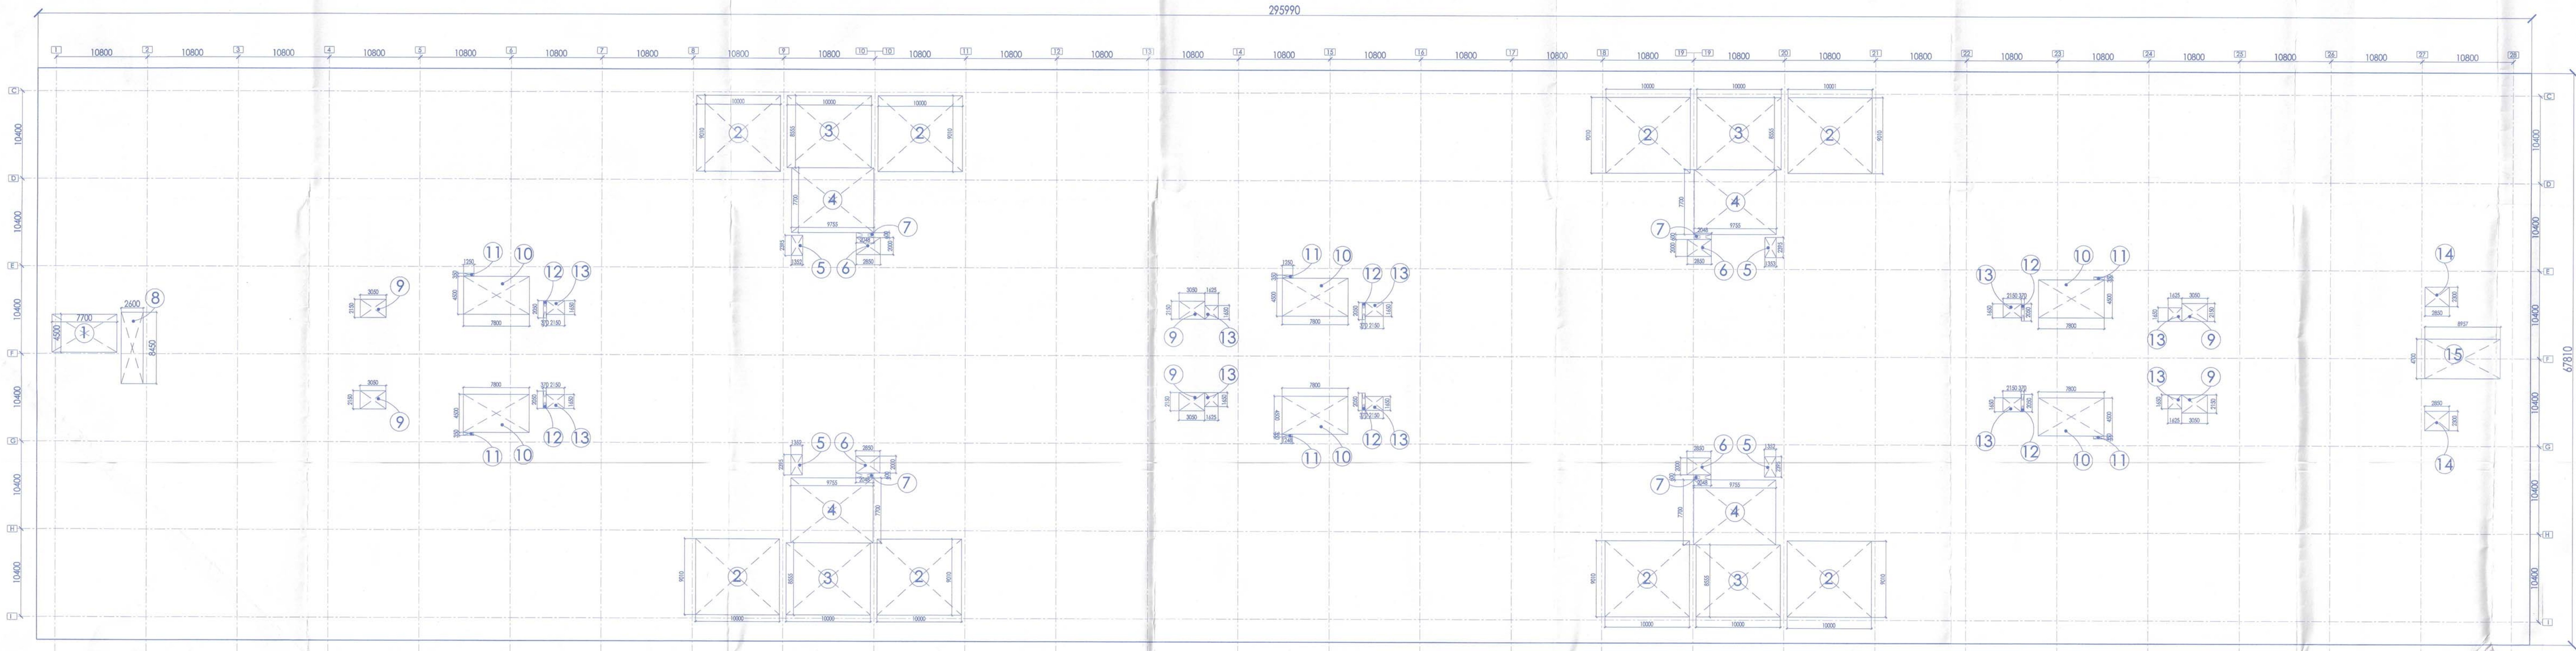

AREA CALCULATIONS FOR GROUND COVERAGE

ADDITIONS							
A	295.990	x	67.81	x	1	=	20071.08 SQ.MT
	TOTAL					=	20071.08 SQ.MT (A)
DEDUCTIONS							
1	7.700	x	4.5	x	1	=	34.65 SQ.MT
2	10.000	x	9.01	x	8	=	720.80 SQ.MT
3	10.000	x	8.555	x	4	=	342.20 SQ.MT
4	9.755	x	7.7	x	4	=	300.45 SQ.MT
5	1.352	x	2.395	x	4	=	12.95 SQ.MT
6	2.850	x	2	x	4	=	22.80 SQ.MT
7	2.048	x	0.6	x	4	=	4.92 SQ.MT
8	2.600	x	8.45	x	1	=	21.97 SQ.MT
9	3.050	x	2.15	x	6	=	39.35 SQ.MT
10	7.800	x	4.5	x	6	=	210.60 SQ.MT
11	1.250	x	0.35	x	6	=	2.63 SQ.MT
12	0.370	x	2.05	x	6	=	4.55 SQ.MT
13	2.150	x	1.65	x	6	=	21.29 SQ.MT
14	2.850	x	2.3	x	2	=	13.11 SQ.MT
15	8.957	x	4.7	x	1	=	42.10 SQ.MT
	TOTAL					=	1794.36 SQ.MT (B)
AREA FOR GROUND COVERAGE (A-B)							= 18276.727 SQ.MT (C)

AREA CALCULATION OF GROUND COVERAGE