GROUND FLOOR AREA (BLOCK - C)										
GROSS - A										
1	=	0.5	X	9.660	+	32.366	X	12.737	=	267.783 SQM
2	=	0.5	X	52.366	+	14.999	X	70.307	=	1665.116 SQM
3	=	0.5	X		3.584		X	0.885	=	1.586 SQM
4	=	0.5	X		3.584		X	14.114	=	25.260 SQM
5	=	0.5	X	80.959	+	88.479	X	29.618	=	2926.207 SQM
6	=	0.5	X		16.628		X	29.618	=	246.244 SQM
								TOTAL	=	4715.228 SQM
TOTAL FAR AREA OF GROUND FLOOR							=	GROSS - A		
							=	4715.228	SQM	
GROUND COVERAGE (BLOCK - C)										
GROSS – B										
gr1	=	0.5	X		5.435		X	9.660	=	26.305 SQM
gr2	=	0.5	X		2.336		X	8.460	=	9.881 SQM
gr3	=	1	X		73.804		X	8.460	=	624.382 SQM
gr4	=	1	X		16.307		X	5.797	=	94.532 SQM
								TOTAL	=	755.100 SQM
TOTAL GROUND COVERAGE (BLOCK - C)							=	GROSS - C	+	GROSS – D
							=	4715.228	+	755.100
							=	5470.328	SQM	

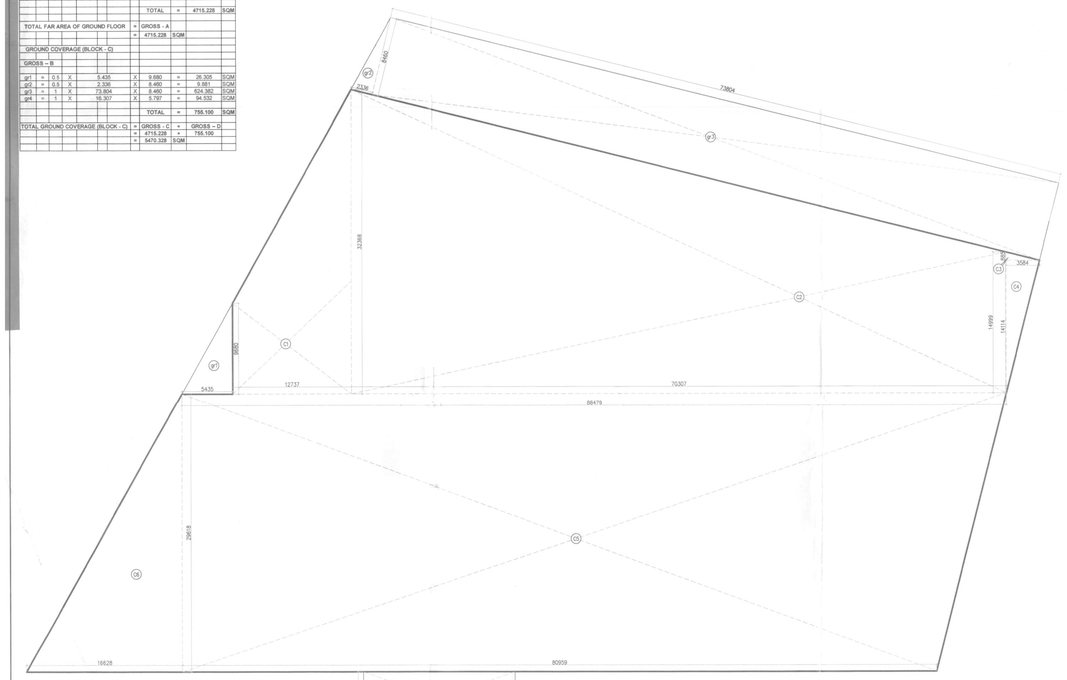

GROUND FLOOR/GROUND COVERAGE
(BLOCK – C)

TYPICAL (1st TO 3rd) PODIUM AREA (BUILDING- C)										
GROSS - A										
p1	=	0.5	X		13.032	X	3.219	=	20.975	SQM
p2	=	0.5	X		13.032	X	51.322	=	334.414	SQM
p3	=	0.5	X	54.541	+ 69.069	X	58.810	=	3034.752	SQM
p4	=	0.5	X		38.777	X	69.069	=	1339.144	SQM
							TOTAL	=	5329.286	SQM
GROSS – B										
s1	=	4	X		2.000	X	1.755	=	14.040	SQM
s2	=	2	X		2.525	X	2.800	=	14.140	SQM
s3	=	1	X		2.220	X	2.625	=	5.828	SQM
s4	=	1	X		3.015	X	3.940	=	11.879	SQM
s5	=	1	X		2.965	X	3.040	=	9.074	SQM
s6	=	1	X		2.220	X	3.100	=	6.882	SQM
s7	=	1	X		2.880	X	3.300	=	9.504	SQM
s8	=	1	X		3.015	X	3.725	=	11.231	SQM
							TOTAL	=	82.276	SQM
NET AREA OF PODIUM-1,2&3 FLOOR (BUILDING- C)						=	GROSS - A			
						=	5329.286	SQM		
PARKING AREA OF PODIUM-1,2&3 FLOOR (BUILDING- C)						=	GROSS - A	-	GROSS – B	- GROSS-P
						=	5329.286	-	82.276	- 56.406
						=	5190.603	SQM		
PARKING CAPACITY OF PODIUM-1,2,3 (BUILDING- C)						=	5190.603	/	28	
						=	185.379	SAY	187 CARS	

F.A.R AREA OF PODIUM									
A	=	1	X	7.266	X	5.595	=	40.65327	SQM
B	=	1	X	2.82	X	1.815	=	4.8542	SQM
C	=	1	X	3.33	X	3.27	=	10.8891	SQM
					TOTAL GROSS-P		=	56.40657	SQM
NON F.A.R AREA OF PODIUM						=	GROSS-A	-	GROSS-P
						=	5329.286	-	56.406
						=	5272.88	SQM	

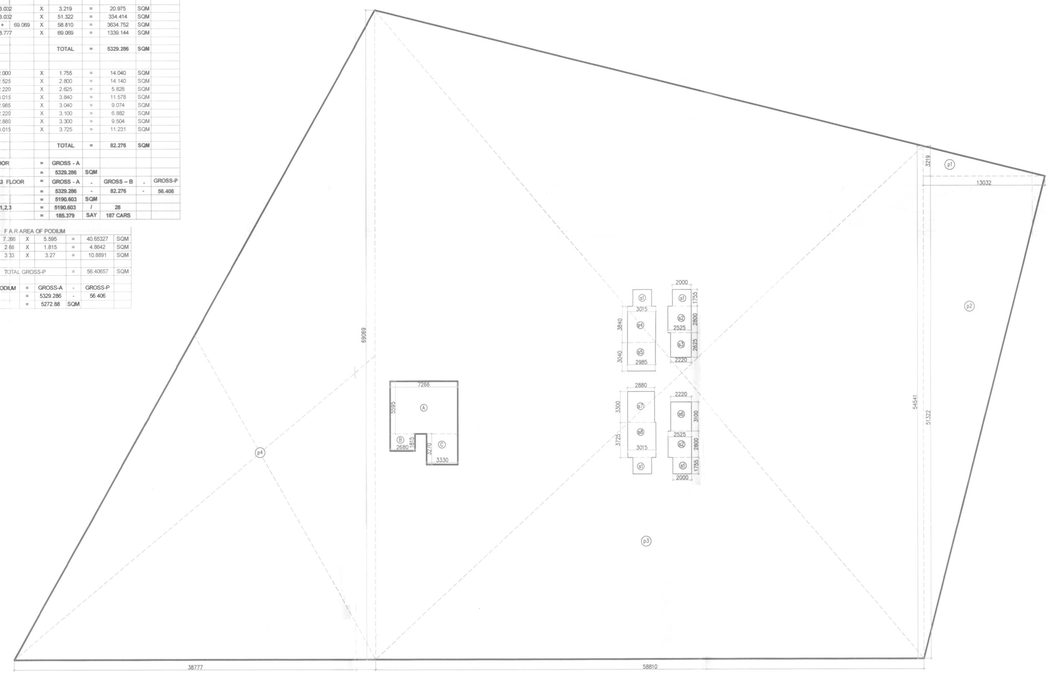

TYPICAL (1st TO 3rd) PODIUM
BLOCK – C

FAR AREA OF 7TH & 11TH FLOOR (BLOCK - C)										
GROSS - A										
C15	=	0.5	X		38.777		X	69.069	=	1339.144 SQM
C16	=	0.5	X	69.069	+	54.541	X	58.810	=	3034.752 SQM
C17	=	0.5	X		13.032		X	51.322	=	334.414 SQM
C18	=	0.5	X		13.032		X	3.219	=	20.975 SQM
								TOTAL	=	5329.286 SQM
GROSS – B										
X4	=	0.5	X	2.455	+	2.960	X	0.900	=	2.437 SQM
X5	=	1	X		1.200		X	1.625	=	1.230 SQM
X6	=	1	X		2.950		X	1.900	=	5.054 SQM
X7	=	1	X		8.660		X	4.715	=	40.832 SQM
X8	=	1	X		1.200		X	0.900	=	1.080 SQM
X9	=	0.5	X		2.378		X	4.236	=	5.037 SQM
X10	=	0.5	X		1.797		X	3.200	=	2.875 SQM
X11	=	1	X		2.308		X	3.200	=	7.386 SQM
X12	=	1	X		2.960		X	0.900	=	2.664 SQM
X13	=	1	X		2.660		X	1.900	=	5.054 SQM
X14	=	1	X		8.660		X	4.715	=	40.832 SQM
X15	=	2	X		5.225		X	5.050	=	52.773 SQM
X16	=	2	X		2.325		X	5.160	=	23.994 SQM
X17	=	1	X		4.770		X	4.180	=	19.939 SQM
X18	=	1	X		0.950		X	1.725	=	1.553 SQM
X19	=	1	X		1.520		X	1.726	=	2.624 SQM
X20	=	1	X		2.335		X	2.200	=	5.137 SQM
X21	=	3	X		2.200		X	3.100	=	20.460 SQM
X22	=	3	X		1.790		X	1.410	=	7.572 SQM
X23	=	3	X		0.800		X	3.150	=	7.560 SQM
X24	=	3	X		0.436		X	1.410	=	1.844 SQM
X25	=	15	X		2.545		X	2.650	=	101.164 SQM
X26	=	1	X		2.475		X	0.670	=	1.658 SQM
X27	=	1	X		0.610		X	0.915	=	0.407 SQM
X28	=	1	X		0.570		X	0.555	=	0.400 SQM
X29	=	1	X		1.470		X	0.670	=	0.985 SQM
X30	=	2	X		2.545		X	0.670	=	3.410 SQM
X31	=	1	X		2.475		X	1.570	=	3.886 SQM
X32	=	1	X		2.965		X	1.570	=	4.656 SQM
X33	=	1	X		2.220		X	2.065	=	4.584 SQM
X34	=	1	X		7.550		X	5.050	=	38.128 SQM
X35	=	1	X		1.300		X	2.745	=	3.568 SQM
X36	=	1	X		3.240		X	3.975	=	12.879 SQM
X37	=	1	X		1.300		X	1.550	=	1.802 SQM
X38	=	1	X		1.300		X	2.155	=	2.802 SQM
X39	=	1	X		3.240		X	2.155	=	6.982 SQM
R1	=	0.5	X		4.739		X	8.441	=	20.001 SQM
R2	=	0.5	X	9.261	+	8.079	X	4.784	=	41.477 SQM
R3	=	1	X		0.932		X	0.821	=	0.437 SQM
R4	=	0.5	X	13.694	+	8.166	X	22.378	=	244.582 SQM
R5	=	1	X		0.917		X	3.005	=	2.756 SQM
								TOTAL	=	794.196 SQM
TOTAL FAR AREA OF 7TH & 11TH FLOOR – BLOCK-C							=	GROSS - A	-	GROSS – B
							=	5329.286	-	794.196
							=	4529.090	SQM	
GROSS – N										
NON F.AR AREA										
X15	=	2	X		5.225		X	5.050	=	52.773 SQM
X16	=	2	X		2.325		X	5.160	=	23.994 SQM
X04	=	1	X		7.550		X	5.050	=	38.128 SQM
								TOTAL	=	114.894 SQM

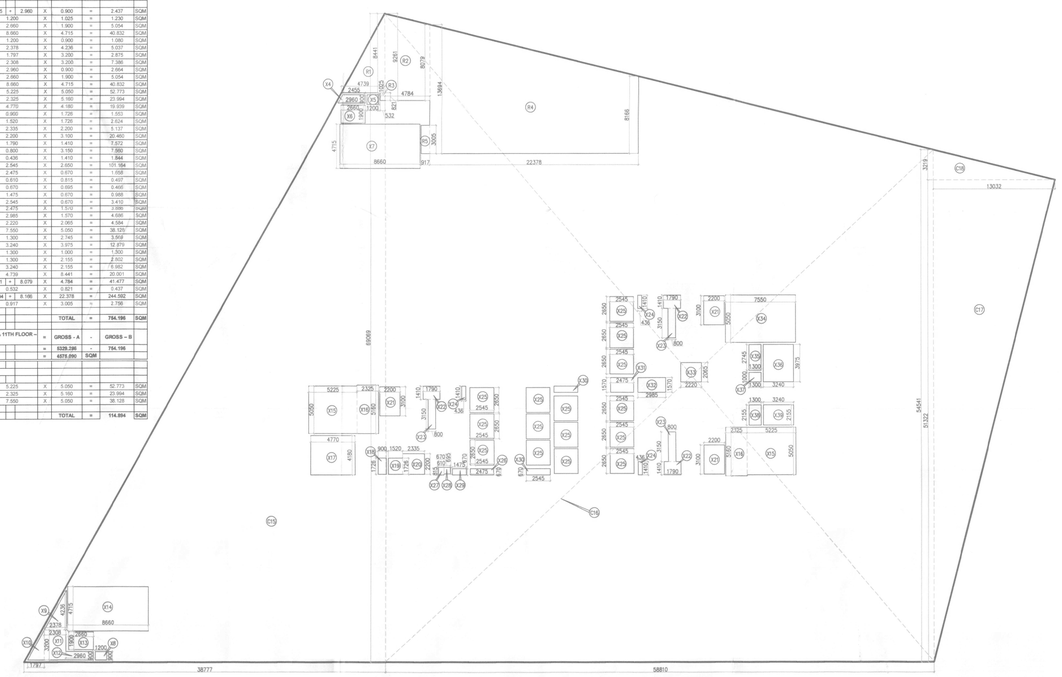

TYPICAL FLOOR(7th & 11th)
BLOCK – C

TYPICAL FLOOR(4th TO 6th,8th TO 10th & 12th) AREA (BLOCK - C)										
GROSS - A										
C15	=	0.5	X		38.777		X	69.069	=	1339.144 SQM
C16	=	0.5	X	69.069	+	54.541	X	58.810	=	3034.752 SQM
C17	=	0.5	X		13.032		X	51.322	=	334.414 SQM
C18	=	0.5	X		13.032		X	3.219	=	20.975 SQM
								TOTAL	=	5329.286 SQM
GROSS – B										
X4	=	0.5	X	2.455	+	2.960	X	0.900	=	2.437 SQM
X5	=	1	X		1.200		X	1.625	=	1.230 SQM
X6	=	1	X		2.950		X	1.900	=	5.054 SQM
X7	=	1	X		8.660		X	4.715	=	40.832 SQM
X8	=	1	X		1.200		X	0.900	=	1.080 SQM
X9	=	0.5	X		2.378		X	4.236	=	5.037 SQM
X10	=	0.5	X		1.797		X	3.200	=	2.875 SQM
X11	=	1	X		2.308		X	3.200	=	7.386 SQM
X12	=	1	X		2.960		X	0.900	=	2.664 SQM
X13	=	1	X		2.660		X	1.900	=	5.054 SQM
X14	=	1	X		8.660		X	4.715	=	40.832 SQM
X15	=	2	X		5.225		X	5.050	=	52.773 SQM
X16	=	2	X		2.325		X	5.160	=	23.994 SQM
X17	=	1	X		4.770		X	4.180	=	19.939 SQM
X18	=	1	X		0.950		X	1.725	=	1.553 SQM
X19	=	1	X		1.520		X	1.726	=	2.624 SQM
X20	=	1	X		2.335		X	2.200	=	5.137 SQM
X21	=	3	X		2.200		X	3.100	=	20.460 SQM
X22	=	3	X		1.790		X	1.410	=	7.572 SQM
X23	=	3	X		0.800		X	3.150	=	7.560 SQM
X24	=	3	X		0.436		X	1.410	=	1.844 SQM
X25	=	15	X		2.545		X	2.650	=	101.164 SQM
X26	=	1	X		2.475		X	0.670	=	1.658 SQM
X27	=	1	X		0.610		X	0.915	=	0.407 SQM
X28	=	1	X		0.570		X	0.695	=	0.466 SQM
X29	=	1	X		1.470		X	0.670	=	0.998 SQM
X30	=	2	X		2.545		X	0.670	=	3.410 SQM
X31	=	1	X		2.475		X	1.570	=	3.886 SQM
X32	=	1	X		2.965		X	1.570	=	4.656 SQM
X33	=	1	X		2.220		X	2.065	=	4.584 SQM
X34	=	1	X		7.550		X	5.050	=	38.128 SQM
X35	=	1	X		1.300		X	2.745	=	3.568 SQM
X36	=	1	X		3.240		X	3.975	=	12.879 SQM
X37	=	1	X		1.300		X	1.550	=	1.802 SQM
X38	=	1	X		1.300		X	2.155	=	2.802 SQM
X39	=	1	X		3.240		X	2.155	=	6.982 SQM
								TOTAL	=	444.934 SQM
TOTAL FAR AREA OF TYPICAL FLOOR(4th TO 6th,8th TO 10th & 12th)							=	GROSS - A	-	GROSS – B
							=	5329.286	-	444.934
							=	4884.352	SQM	
GROSS – N										
NON F.AR AREA										
X15	=	2	X		5.225		X	5.050	=	52.773 SQM
X16	=	2	X		2.325		X	5.160	=	23.994 SQM
X04	=	1	X		7.550		X	5.050	=	38.128 SQM
								TOTAL	=	114.894 SQM

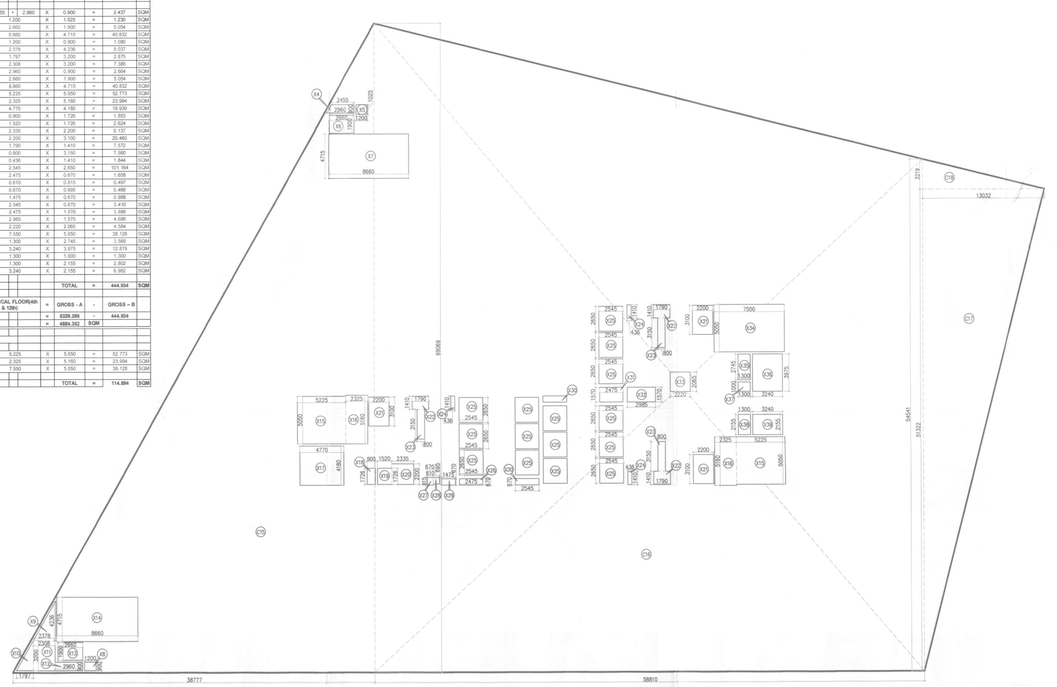

TYPICAL FLOOR(4th TO 6th,8th TO 10th & 12th)
BLOCK – C

DRG NO. BC-03

KEY PLAN

DLF45399

(RAM AVTAR BASSI)
A.D.

Architect
Hafeez
Contractor
29 Bank Street, Bombay 400 023. Tel:2667870

RSMS ARCHITECTS

RSMS ARCHITECTS PVT. LTD.
69,Nora Niwas Bhawani Kunj
(Behind D2), Vasant Kunj,
New Delhi-110070.
Tel.:011-26898616,26898617
www.rsms-arch.com

Project:

PROPOSED BUILDING PLAN OF BUILDING – C, BUILDING –D, BUILDING –E AND BUILDING –F IN 94.57485 ACRES DLF CYBER CITY, SECTOR 24, 25 & 25A, GURGAON, HARYANA.

OWNER: DLF

DLF Cyber City Developers Ltd.
10th Floor DLF Gateway Tower,
DLF Cyber City,Gurugram,Haryana
Pin:122002

DRAWING TITLE: –

BUILDING -C
AREA CALCULATION OF
GROUND TO 12TH FLOOR

REVISION	JOB NO: –	DRG NO. BC-03	NORTH: –
	SCALE: – 1: 200	DATE: – 16-05-2018	
FILE: –	DEALT BY: –	CHECKED BY:	APPROVED BY: –
ARCHITECT'S SEAL & SIGNATURE		OWNER'S SEAL & SIGNATURE	